



REC'D PC/PTO 11 JAN 2005
K01632003/003134



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 03 SEP 2003

WIPO

PC

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Andrew Genovese

Dated 15 August 2003

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

An Executive Agency of the Department of Trade and Industry



The
Patent
Office

25JUL02 E735871-2 002890
P01/7700 0.00-0217190.8

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

24 JUL 2002

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

SNR07619GB

2. Patent application number

(The Patent Office will fill in this part)

0217190.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

REMPLOY LIMITED
Stone Court
Siskin Drive
Coventry CV3 4FJ

Patents ADP number (if you know it)

684 266 003

If the applicant is a corporate body, give the country/state of its incorporation

UK

4. Title of the invention

PROTECTION PAD AND DEVICE

5. Name of your agent (if you have one)

Gill Jennings & Every

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Broadgate House
7 Eldon Street
London
EC2M 7LH

Patents ADP number (if you know it)

745002 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

- 9 Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	11
Claim(s)	-
Abstract	-
Drawing(s)	5 + 5

PE

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (<i>Patents Form 7/77</i>)	-
Request for preliminary examination and search (<i>Patents Form 9/77</i>)	-
Request for substantive examination (<i>Patents Form 10/77</i>)	-
Any other documents (<i>please specify</i>)	NO

11. For the applicant
Gill Jennings & Every

I/We request the grant of a patent on the basis of this application.

Signature

Date

24 July 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

RACKHAM, Stephen Neil
020 7377 1377

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

PROTECTION PAD AND DEVICE

When people fall, particularly the elderly and frail
5 or those less active whilst recovering from surgery, for
example, they tend to fall on their side. This can lead to
them breaking their femur particularly at the head around
the trochantheric region. The head of the femur includes
a portion called the greater trochanter which projects
10 outwards and which is covered by very little flesh. When
falling sideways onto this region the femur can strike the
ground and with very little flesh to cushion the impact,
the femur is subjected to a considerable force which may be
equivalent to as much as five times body weight acting on
15 the greater trochanter. Since the inner end of the head of
the femur is held substantially rigidly by the pelvis, the
femur itself cannot move inwards to absorb the shock and
this leads to the breakage of the femur in the
trochantheric region.

20 Many proposals have been made to provide protection
for this region for people who are particularly at risk and
these usually involve placing some external padding or
protective shell over the region of the greater trochanter.
However, these often fail to absorb sufficient of the
25 impact, or fail to distribute it over a sufficiently large
area and so the resulting shear forces cause significant
damage to the surrounding soft tissue. One example of a
prior proposal is shown in WO 98/44817 which discloses an
undergarment with pockets covering the trochantheric
30 regions and protective pads arranged to be fitted into the
pockets. The protective pads each comprise a substantially
rigid outer shield with co-terminous inner layers of foam
material. Another example of a prior proposal is shown in
WO 95/19154 in which a domed shield is provided. The domed
35 shield may have a substantially rigid plastics core
surrounded by a foamed plastics material. A pair of domed

shields are typically installed in an undergarment in positions to cover the trochantheric regions.

According to a first aspect of this invention a pad for use in protecting the trochantheric region of the body comprises at least two separate layers, a substantially rigid layer, and a layer of dense, closed-cell resilient foam material, the substantially rigid layer including a projecting boss which, in use, is located in the region of the greater trochanter to increase the spacing between the outside of the rigid layer and the greater trochanter.

The projecting boss provides the first point of contact when a person wearing the pad falls sideways onto the ground. As a result of the boss providing the first point of contact the forces resulting from the fall can be dissipated, transferred and spread over the person's body in a controlled way to reduce the effect of the fall on the person. Preferably, the side walls of the projecting boss are substantially frusto-conical so that the base of the boss extends over a greater area than the top. The inclined side walls contribute to spreading the impact load received by the top of the boss sideways and outwards and so, in use, away from the region of the greater trochanter. Preferably the side walls are flared outwards at the base to merge into the remainder of the substantially rigid layer and join the top of the boss at a rounded corner. The top of the boss may be thinner than the remainder of the rigid layer with the sidewall of the boss having a thickness corresponding to that of the remainder of the substantially rigid layer at its base and tapering to that of the top of the boss at its top. By configuring the boss in this way it is possible to provide a so-called "crumple zone" on the outermost part of the boss with the deformation of the crumple zone absorbing a significant amount of the impact energy of any fall. This combination of features enables the high impact pressure applied to the top of the boss to be dissipated into a lower pressure spread over the remainder of the pad in a controlled way.

The reduction in pressure reduces shear in the surrounding soft tissue and so reduces and substantially eliminates damage in this region.

Preferably a void is located beneath the boss either
5 between the inside of the boss and the layer of foam, or
beneath the layer of foam. This is especially important
when the boss is configured to provide a crumple zone. The
substantially rigid layer may be embedded in a closed cell
foam material. In this case the closed cell foam material
10 may be thinner on the outside of the top of the boss than
on the remainder of the substantially rigid layer so that
the boss is not apparent on merely looking at the external
appearance of the pad. However, in this case, the presence
of the boss can easily be located by feel which is useful
15 for reasons which will be explained subsequently.

The substantially rigid layer may be formed of metal,
particularly a low density metal such as aluminium or an
aluminium alloy but preferably it is formed from a plastics
material and is produced by moulding, preferably injection
20 moulding. Polypropylene is a convenient and reasonably
cheap material which is generally suitable but plain or
filled nylon, polyurethane and other so-called "engineering
plastics" may be used particularly where it is required to
configure the shape and performance characteristics of the
25 boss to provide a crumple zone.

Preferably, the layer of closed cell foam material
extends over a greater area than the substantially rigid
layer so that the periphery of the substantially rigid
layer lies entirely within the periphery of the foam layer.
30 Any pressure or impact load on the boss of the
substantially rigid layer is dissipated throughout the
remainder of the rigid layer up to the periphery and is
then cushioned by the foam layer. In this way the impact
load is spread over a considerably greater area and so does
35 not cause significant damage to the underlying soft tissue.
This is especially so at the periphery of the substantially

rigid layer since it is surrounded by the foam layer extending over a greater area.

The pad may include a third layer of less dense foam material remote from the substantially rigid layer. In this case it is preferred that the third layer has a greater extent than the layer of closed-cell foam and that the periphery of the layer of closed-cell foam lies wholly within the periphery of the third layer. The third layer further cushions and spreads any impact load. Equally since the periphery of the third layer extends outwards furthest and is the softest and thus must easily deformable, it merges into the shape and contour of the wearer's body so making the protective pad less obtrusive and providing wearing comfort.

The inside of the projecting boss may be partly filled with an additional layer of foam or a gel pad. This provides a greater degree of resilient padding over the greater trochanter region of the body where the femur is closest to the body surface and so affords greater protection. This is especially true when a crumple zone is incorporated into the boss.

Preferably, the third layer is formed of open cell foam material. Both foam layers may be formed from polyurethane but preferably the closed cell foam is formed from EVA and the third layer may be formed from a conformable foam material such as that known by the trade name of PLASTAZOTE. Both foam layers may be moulded and particularly moulded to have a smooth outer appearance with edges that taper and merge into the wearer's body. Such tapering edges further enable pressure to be distributed in a controlled way to the body. However, it is simpler for the pieces merely to be die-cut from sheet material. Preferably the rigid layer is adhered to the closed cell foam layer and the closed cell foam layer adhered to the third layer. Of course when the substantially rigid layer

is embedded within the closed cell foam layer adhesive is not usually required.

Preferably, apertures are provided through at least the rigid and closed cell foam layers of a pad to provide for ventilation. Ventilation holes should also be provided through the third layer if the third layer includes closed cell material but, if the third layer is formed from open cell material it may not be necessary specifically to include ventilation holes. The ventilation holes may increase in size from the substantially rigid layer, through the closed cell foam layer to the third layer so that the layer closest to the wearer's skin includes the largest ventilation holes. By providing ventilation holes this improves the dissipation of heat and moisture from beneath the pad, in use, and so makes the wearing of the pad more comfortable for the user. A layer of wicking material such as that known by the trade name of CAMBRELLE may be provided on the side of the pad adjacent the wearer to dissipate any perspiration.

According to a second aspect of this invention protection device for covering the trochantheric region of the body includes two protective pads in accordance with the first aspect of the invention connected to support means so that, in use, the pads cover the trochantheric regions of the user of the protection device.

The support means may include a strap which fits around the user's waist and, optionally, straps that fit around the user's thighs. In this case, the pads are attached to the strap at locations which, when the strap is worn around a users waist, the pads, and particularly the raised bosses of the pads, lie over the region of the greater trochanter. It is preferred that the support means has the form of a garment which covers the trochantheric area and preferably has the form of an undergarment having a waistband and being arranged, in use, to extend down the thighs of the wearer. Preferably the waistband is

elasticated. Preferably the garment comes in a number of standard sizes. Preferably the girth of the garment is adjustable so that the undergarment can be adjusted to fit the wearer precisely when the wearer is of a size which is intermediate that of the standard size undergarments. Typically the garment includes an adjustable front panel adjustable by about 100 mm.

The garment may be formed as a disposable garment and, for example, manufactured from a non-woven material. In this case it is preferred that the pads are permanently fixed to the garment, for example by stitching, a mechanical fastening or adhesive. Alternatively, the garment may be intended to be a reusable garment and, in this case, it is preferred that the garment includes pockets which hold the pads. Preferably, garments of different size still include pockets of the same size to take commonly sized protective pads. Where the pads are held in pockets in the garment the pads may be held simply by the shape and size of the pocket or by additional fixing means such as, for example, snap fastenings or hook and loop type fastenings. When the garments do not include pockets the pads can of course be directly connected to the inside or outside of the garments by snap fastenings or hook and loop type fastenings, for example.

Many users of the protection device may also have difficulty in toileting. Accordingly, the garment may include a releasable gusset and/or be adapted to receive incontinence pads. The garment may also be designed to be washable and include absorbent material.

Particular examples in accordance with this invention will now be described with reference to the accompanying drawings; in which:-

Figure 1 is an exploded perspective view of components forming a first example of a pad;

Figure 2 is a cross-section through the first example;

Figure 3 is a longitudinal section through the first example;

Figure 4 is a longitudinal section through a second example of pad;

5 Figure 5 is an exploded perspective view of the components forming a third example of pad;

Figure 6 is a plan view of a third example of pad;

Figure 7 is a sectioned perspective view of a fourth example of pad;

10 Figure 8 is a scrap longitudinal section through a modification of a pad;

Figure 9 is a first example of a protection device including the pads;

Figure 10 is a second example of protection device;

15 Figure 11 is a third example of protection device; and,

Figure 12 is a modification of the third example of protection device.

20 The first example of protective pad comprises a substantially rigid layer 1 and a layer of dense closed-cell resilient foam material 2. The substantially rigid layer 1 includes a projecting boss 3 and arrays of ventilation holes 4. The substantially rigid layer 1 also includes thin fixing lugs 5 projecting from its periphery.

25 The dense closed-cell resilient foam layer 2 includes a chamfered outer peripheral region 6, ventilation holes 7 which align with the ventilation holes 4 in the rigid layer 1 and a grooved portion 8 substantially aligned with the periphery of the substantially rigid layer. The

30 ventilation holes 7 may be of larger diameter than the ventilation holes 4 or may be tapered as shown in Figures 2 and 3.

The substantially rigid layer 1 may be formed from polyurethane or polypropylene and the closed cell resilient

35 foam layer 2 may be formed from polyurethane or, for example EVA foam. Preferably the two layers are bonded

together using an adhesive. The periphery of the substantially rigid layer 1 lies wholly within that of the closed cell foam layer 2. The raised boss 3 has a height of about 10 mm and a diameter of about 100 mm. A void 9 is provided between the top of the raised boss 3 and the top of the layer of resilient closed cell foam 2.

Figure 4 shows a second example of protective pad in accordance with this invention in which the substantially rigid layer 1 is embedded within the layer 2 of closed cell resilient foam material. Again the substantially rigid layer 1 includes a raised boss 3 and, in this example, the outer profile of the pad mirrors that of the substantially rigid layer 1 and so also includes a raised boss. However, the thickness of the foam layer 2 over the top of the raised boss 1 may be less than that over the remainder of the substantially rigid layer so that the outer profile of the pad is substantially smooth.

The third example of pad in accordance with this invention and, as shown in Figures 5 and 6 includes three separate layers. Firstly a substantially rigid layer 1, secondly a layer of closed cell resilient foam material 2 and thirdly a layer 10 of open cell resilient foam material 10. As in the first and second example the layer 2 is of greater extent than the layer 1 and layer 10 is also of greater extent than the layer 2 so that the periphery of layer 2 lies wholly within that of layer 10. This is shown most clearly in Figure 6. In the third example the layers 2 and 10 are merely die cut from a sheet of suitable foam material with, effectively, steps formed between each layer. Again the layers are adhered together using a suitable adhesive and each includes ventilation holes 7 (not shown in Figure 5) which may be tapered, as shown in Figures 2 and 3 or be stepped with the largest holes being in layer 10. Again, in this example, a void is provided beneath the underside of the boss 3 and the upper side of the layer 2 similar to the void 9 shown in Figures 2 and 3.

Figure 7 shows a fourth example of pad in accordance with this invention in which, again, three layers 1, 2 and 10 are provided similar to the third example but the layers are moulded to provide a profile with a chamfered edge 6 as shown in the first example. Again each layer 1, 2 and 10 is of greater extent than the preceding layer. In this example the layer 2 extends into and substantially fills the inside of the projecting boss 3.

Figure 8 is a longitudinal section through a modification of the boss 3 showing how its wall thickness varies between a relatively thin wall thickness on a top portion 11 of the boss 3 and a relatively thick wall thickness on the remainder of the layer 1. Figure 8 clearly shows how the wall thickness tapers from the base of the boss along its frustoconical sidewalls to its top. Figure 8 also shows the provision of an additional layer 12 of resilient foam or gel material partly filling the inside of the boss 3 to provide additional resilience and therefore additional padding in this region.

By configuring the wall thickness of the boss 3 in the way shown in Figure 8 it can be arranged that the outermost portion of the boss 3 provides a so-called "crumple zone" upon impact. This crumpling of the outermost portion of the boss 3 absorbs a significant amount of any impact force received by the boss 3. Since the frustoconical sidewalls of the boss 3 are tapered the boss 3 becomes more resistant to deformation as crumpling proceeds to provide a graduated transfer of any impact from the top 11 of the boss 3 to the remainder of the substantially rigid portion 1 and indeed to the remainder of the pad.

In use, the protective pads are oriented generally upright with the raised boss 3 at the top. The layers 1, 2 and 10 are curved in the transverse direction as shown most clearly in Figure 2 so that they conform to the hip and thigh region of a user. The protective pads are located so that the boss 3 lies over the greater

trochanter of the femur of the user. The top edge 13 of the pad is shaped to match the profile of human hips at the iliac crest of the pelvis. Thus the top edge of the pad sits over the muscle interface known as the gluteus medius, that is just below the iliac crest. The iliac crest has an approximate centre of rotation around the greater trochanter and thus, as can be seen in the drawings, the top edge 13 of the pad is approximately arcuate and centred on the centre of the boss 3. This correspondence between the pad and the iliac crest makes it easier to ensure that the protective pad is located at the correct position of the wearer and the location of the boss 3 can easily be located by feel to ensure that it is located in the correct position over the greater trochanter during fitting.

Whilst it is possible for the protective pads to be fixed to the wearer's body by the use of an appropriate medical adhesive applied to its inner surface or, via an intermediate double-sided medical adhesive tape, it is very much preferred that the pads are used with a specially designed support such as shown in Figures 9-12.




Figure 9 shows a first example of protective device comprising a waist strap 20, a pair of leg straps 21, and a pair of pads 22, as previously described, fixed between the waist strap 20 and leg straps 21. The waist strap 20 is of adjustable length and, at least one of the pads 22 is movable along the waist strap 20 so that the support can be fixed to a wearer with the boss 3 of the pads 22 located over the greater trochanter of each leg. The leg straps 21 are also adjustable in length. The straps 20 and 21 may include buckles but preferably they include hook and loop type fastenings. The arrangement shown in Figure 9 gives protection for the trochantheric region of the wearer whilst giving substantially unimpeded access to the wearer by medical staff, for example. The device shown in Figure 9 can be worn underneath, or on top of other garments. This arrangement holds the pads 22 securely in the correct

location whilst, at the same time, providing the least contact with the wearer's body.

A second example of support is shown in Figure 10 and, this example is designed as a disposable, single-use, garment 23 made, preferably from a non-woven material having wicking properties. The entire garment may have some elasticity built in and it includes an elasticated waist band 24 with a front fastening 25. The pads 22 are sewn directly onto the garment 23 using, for example, the fixing lugs 5. The garment may include a fly-front 26 or a gusset which will be described subsequently.

A third example is shown in Figure 11 and comprises an undergarment 27 including an elasticated waistband 28 and elasticated cuffs 29 which fit around the thighs just above the knees. It also includes pockets 30 each sized to accommodate a pad 22. This garment is designed to be reusable and is typically supplied as one of a number of garments, each of which is washable, and a single pair of pads 22 which can be transferred to the garment being worn at any particular instant. The undergarment 27 may include a fly front as shown in Figure 10 or may include an openable gusset 31 as shown in Figure 12. The undergarment 27 may be made from woven or non-woven material and the pockets may remain open at their upper end or may include a fastening, for example a hook and loop fastener, a zip fastener, a snap fastener or hook and eyelet fastener to ensure that the pads 22 are retained in the pockets 30.

All of the garments described above typically come in a variety of sizes and each may include a central adjustable panel to enable it to be tailored to fit exactly around the waist of the user. Typically, the central adjustable panel includes a hook and loop type fastener and is adjustable up to a maximum of 100 mm.

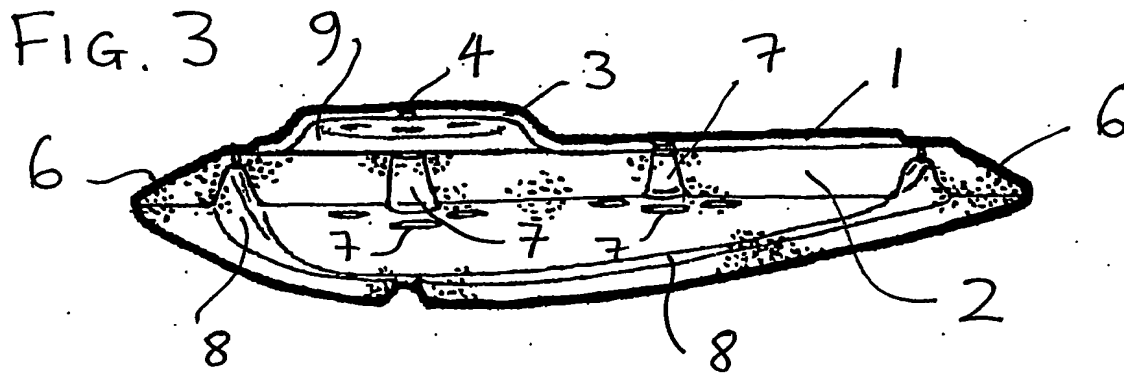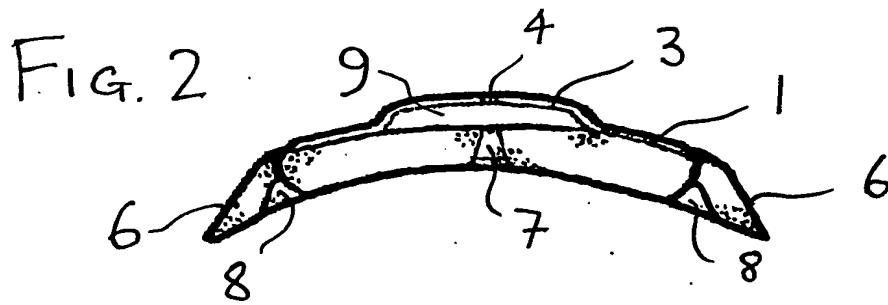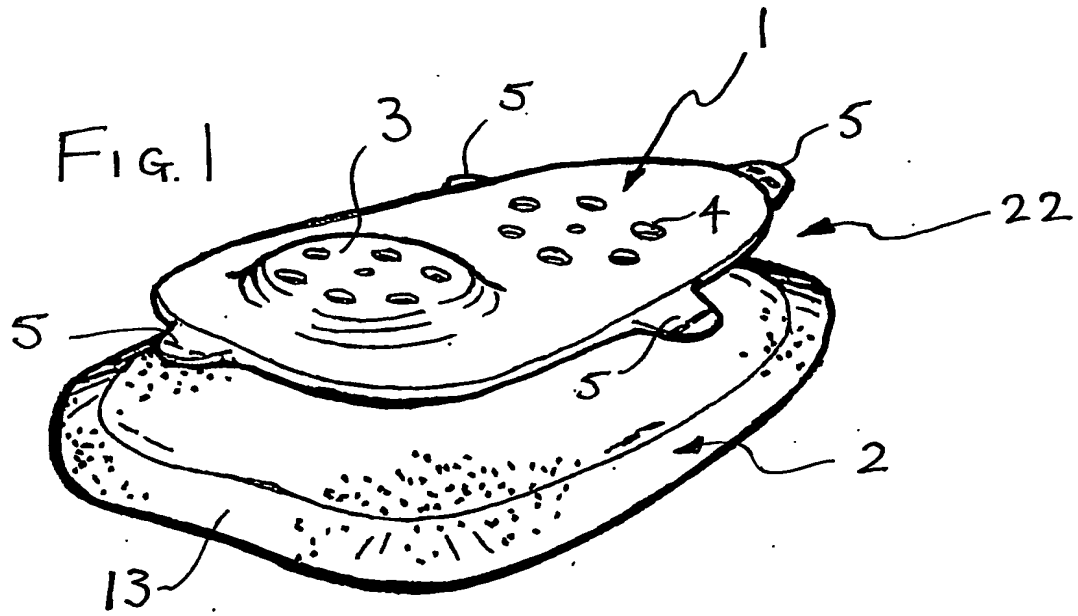

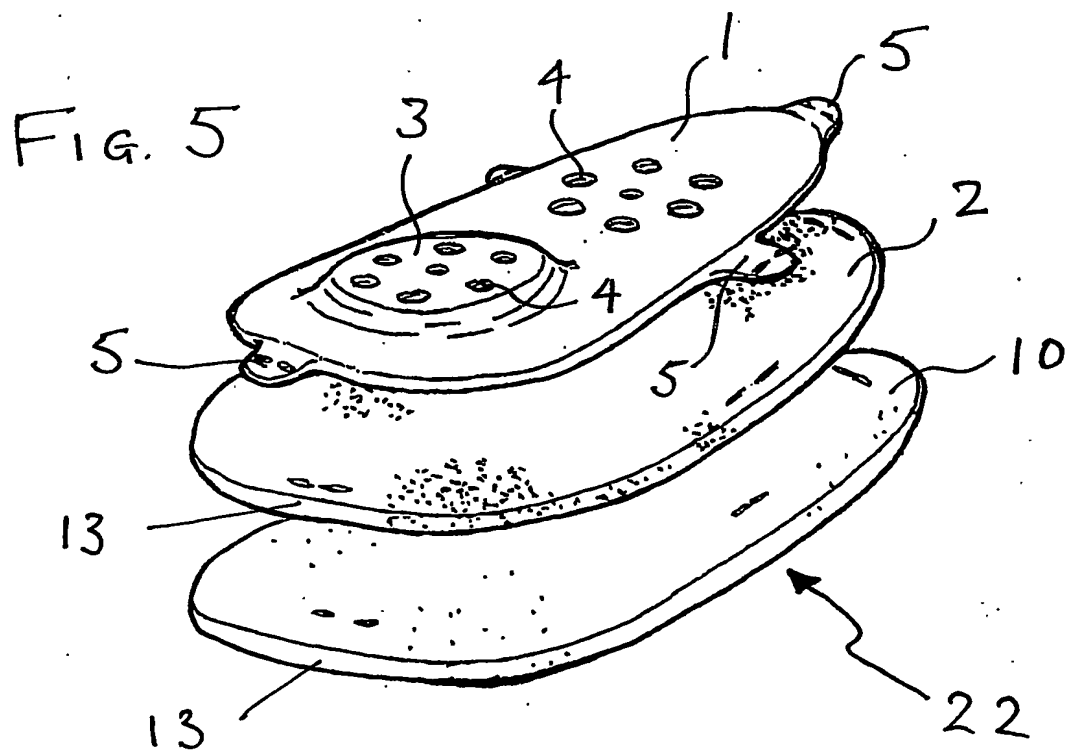
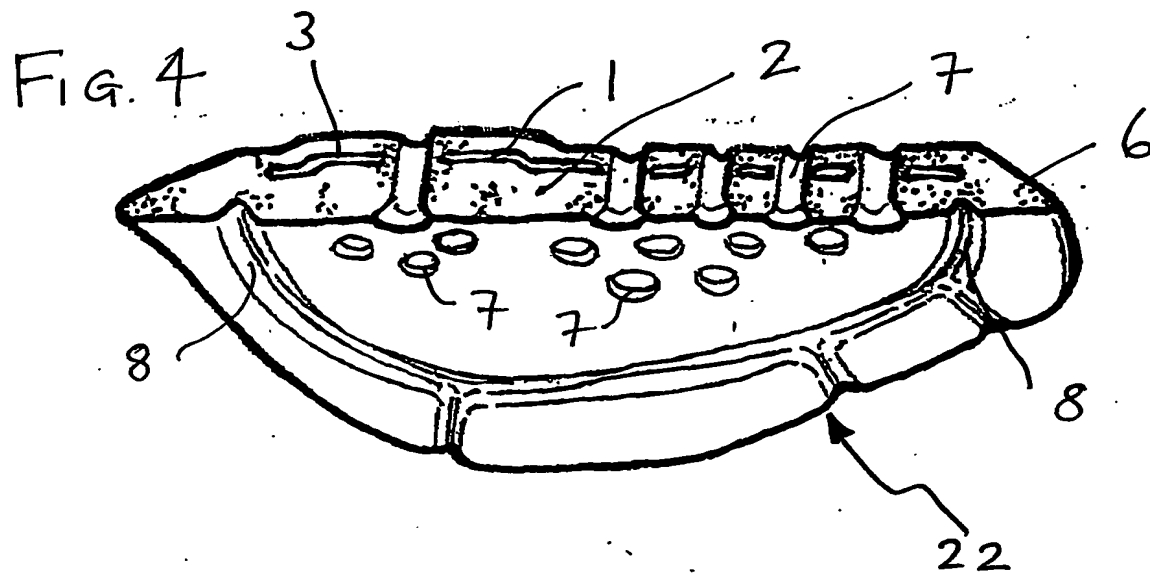


FIG. 6

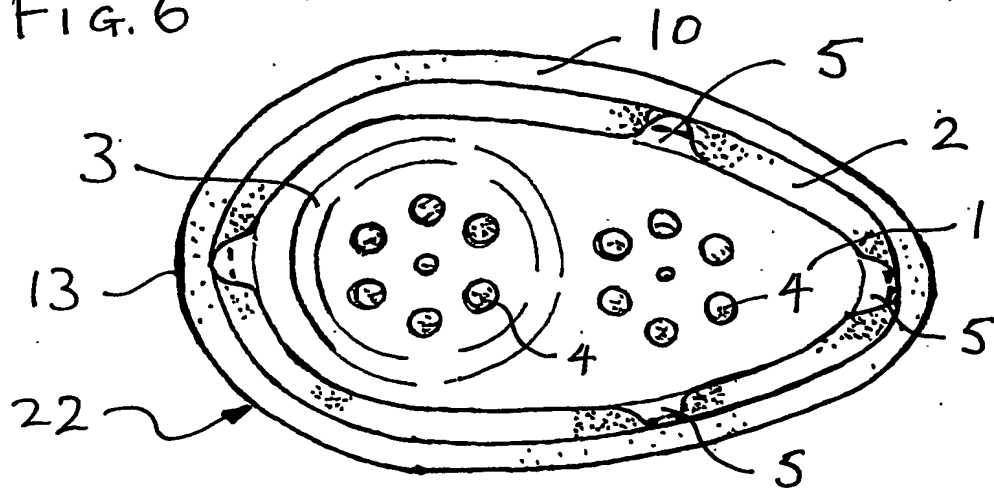


FIG. 7

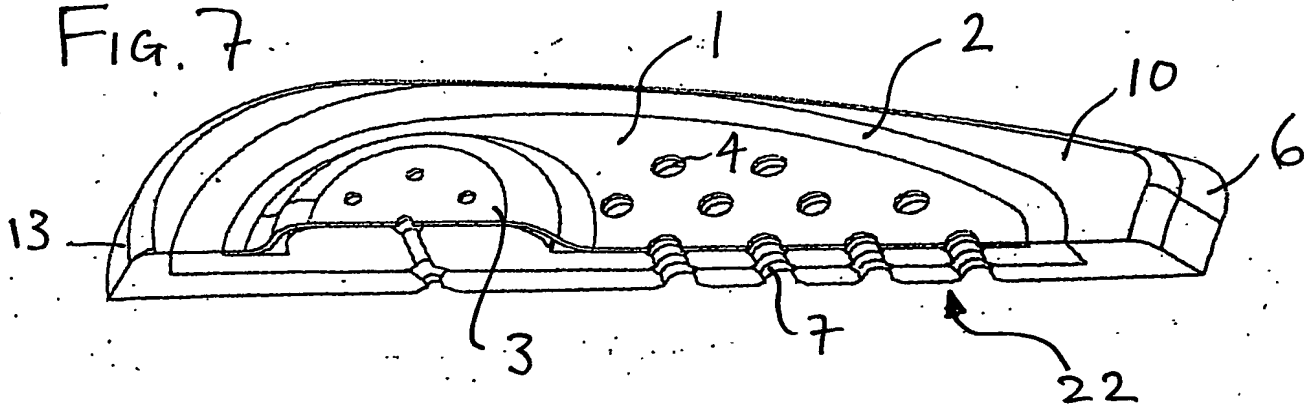


FIG. 8

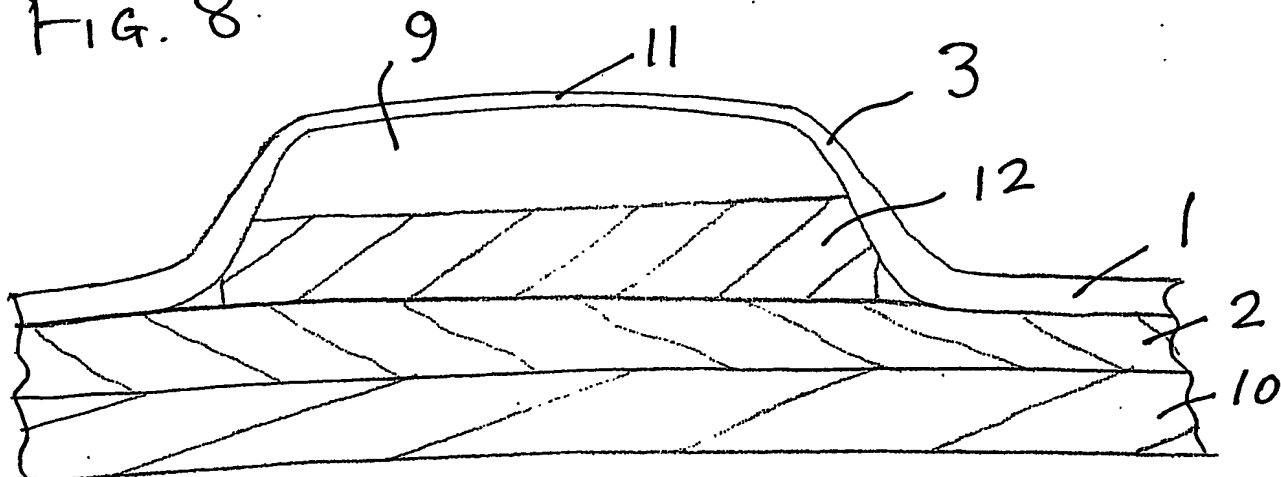


FIG. 10

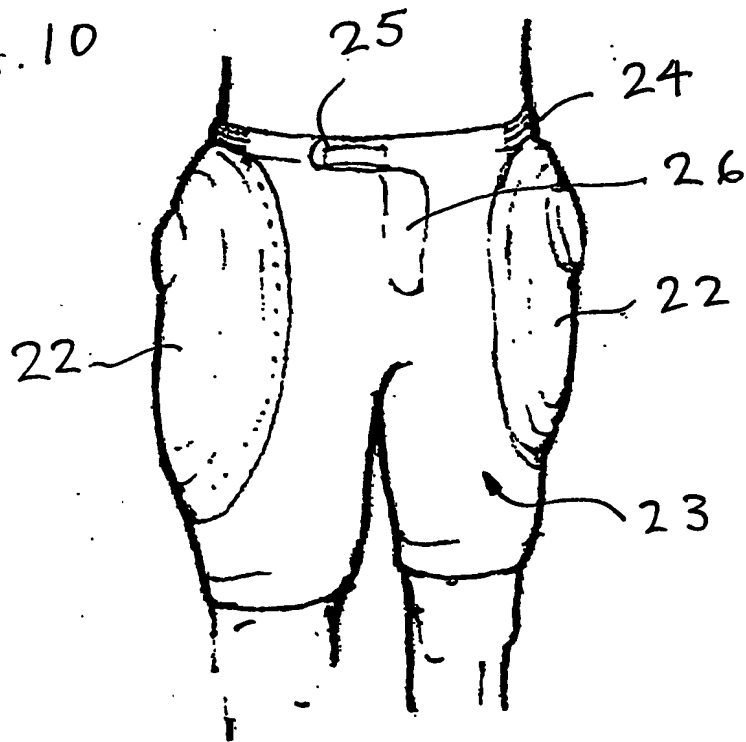


FIG. 9

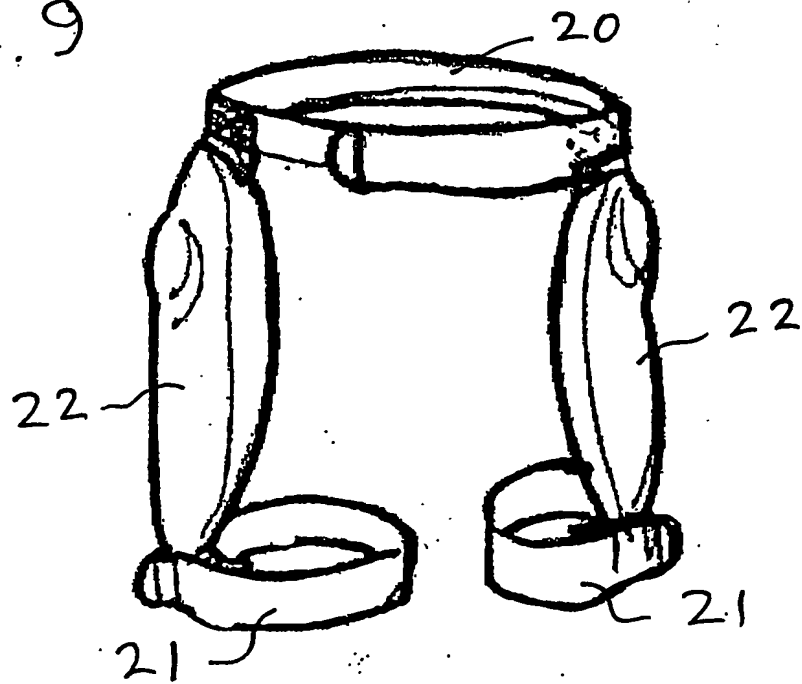


FIG. 11


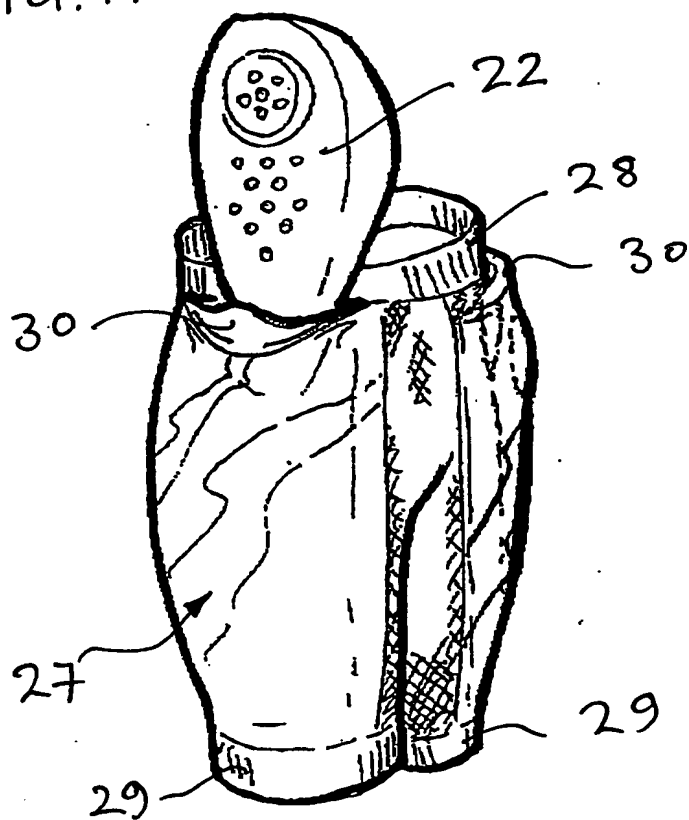


FIG. 12

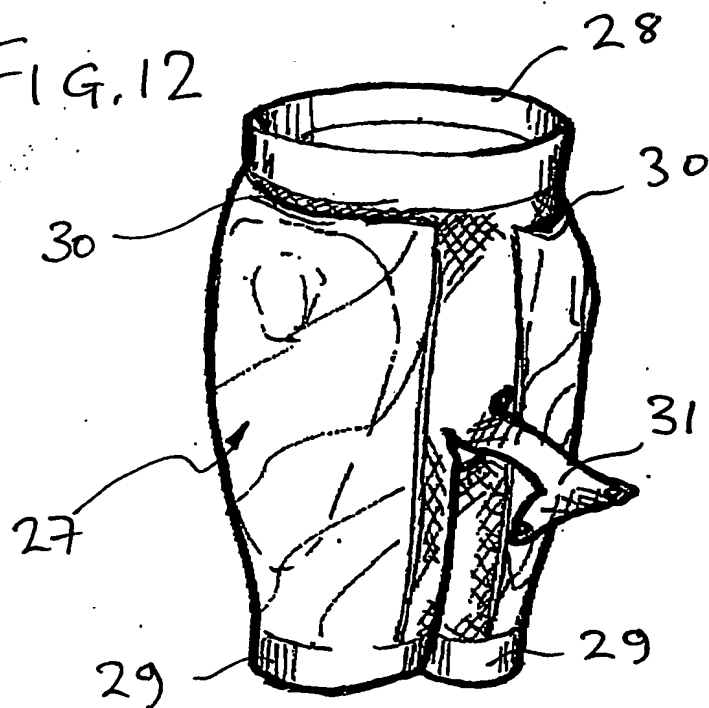

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.